

Procedure for assessing the performance of Parking Autonomous Emergency Braking (P-AEB) systems in low speed manoeuvring collisions

Version 3
December 2023



CONTENTS

1	AIM.....	3
2	SCOPE.....	3
3	BACKGROUND AND RATIONALE	3
4	OBJECTIVE	3
5	DEFINITIONS.....	3
6	TARGETS	5
	6.1 Car target.....	5
	6.2 Bollard target	6
	6.3 Pillar target.....	6
7	TEST VEHICLE PREPARATION	7
	7.1 General	7
	7.2 Tyres.....	7
	7.3 Instrumentation.....	7
8	TEST ENVIRONMENT	7
	8.1 Surface and markings	7
	8.2 Surroundings	8
	8.3 Ambient conditions	8
9	TEST VEHICLE PRE-TEST CONDITIONING	8
	9.1 Brakes and tyres.....	8
10	P-AEB SYSTEM TESTING	9
	10.1 Reversing car-to-car test method	9
	10.2 Reversing car-to-bollard.....	14
	10.3 Reversing car-to-pillar	14
	10.4 Forwards car-to-car	15
	10.5 Forwards car-to-bollard.....	15
	10.6 Maximum steering offset procedure for forwards testing	16
	10.7 Forwards car side-to-bollard.....	17
	10.8 Reverse car side-to-pillar	17
11	P-AEB Scenario Selection	18
12	DATA PROCESSING AND ANALYSIS	19
	12.1 Speed.....	19
	12.2 Longitudinal acceleration.....	19
	12.3 Yaw angle	19
	12.4 Lateral and longitudinal position	19
	12.5 Steering wheel angle (optional)	19
	12.6 Accelerator pedal position (optional)	19
13	TEST RESULTS.....	20
14	SYSTEM PERFORMANCE REQUIREMENTS.....	20

1 AIM

This procedure specifies a method for assessing the performance of Parking Autonomous Emergency Braking (P-AEB) systems in avoiding or mitigating collisions whilst reversing and travelling forwards during low-speed manoeuvres.

2 SCOPE

The test scenarios in this procedure are applicable to passenger cars (category M1) with a P-AEB system fitted. The tests are conducted against a car target, a circular section bollard and a square section pillar. The design intent of the system must be to prevent or mitigate a collision with these objects in a typical real world parking situation.

3 BACKGROUND AND RATIONALE

Analysis of insurance claims databases (UK, Germany, U.S.A, Korea, Australia and Japan) has shown that 15% to 40% of all insurance claims are associated to damage occurring whilst the driver is parking. This equates to 10% to 30% of all claims costs. Further analysis of accident data has identified that around three quarters of all of these parking claims occurred whilst the vehicle was reversing. In around three quarters of cases the impact partner was another vehicle and collisions with tall thin objects such as bollards and pillars were also common. The most commonly damaged area is the vehicle rear (60%), followed by the front and side (both approximately 20%) therefore highlighting a need for round-vehicle protection.

The rationale for the development of this test procedure was therefore to create a standardised set of conditions that would enable the objective and repeatable assessment of P-AEB systems within scope and allow the performance to be reliably quantified.

4 OBJECTIVE

To produce objective, repeatable and reproducible results that is able to quantify the performance of the P-AEB systems in circumstances representative of the most common real-world low speed manoeuvring collisions.

5 DEFINITIONS

Parking Autonomous Emergency Braking (P-AEB) – braking that is applied automatically by the vehicle during a low-speed manoeuvre in response to the detection of a likely collision when the driver has not made any manual application of the brakes.

Reversing Car-to-Car (RCC) – a crash scenario in which the rear of the test car collides with another car positioned in the path of the test car.

Reversing Car-to-Bollard (RCB) – a crash scenario in which the rear of the test car collides with a circular section bollard positioned in the path of the test car.

Reversing Car-to-Pillar (RCP) – a crash scenario in which the rear of the test car collides with a square section pillar positioned directly in the path of the test car.

Forwards Car-to-Car (FCC) – a crash scenario in which the front of the test car collides with another car positioned in the path of the test car.

Forwards Car-to-Bollard (FCB) – a crash scenario in which the front of the test car collides with a circular section bollard positioned in the path of the test car.

Car-to-Bollard Sideswipe (CBS) – a crash scenario in which the side rear half of the test car collides with a circular section bollard positioned to the side of the vehicle.

Car-to-Pillar Sideswipe (CPS) – a crash scenario in which the side rear half of the test car collides with a square section pillar positioned to the side of the vehicle.

Global Vehicle Target (GVT) – a vehicle target with an appropriate vehicle shape, radar and light reflective and visual signature intended for use in this protocol.

Time To Collision (TTC) – the instantaneous distance to the collision position divided by the instantaneous forward vehicle speed.

6 TARGETS

6.1 Car target

The car target used for the AEB tests should have the appropriate radar and light reflective and visual signature of that of a real vehicle, equivalent to that of the Global Vehicle Target (GVT) as described in [TB025 - Global Vehicle Target specification for Euro NCAP v1.0](#) as shown in **Error! Reference source not found.** The use of alternative targets is also permitted as illustrated in Figure 2 to Figure 6.



Figure 1 – Thatcham Research / AZT/IIHS Global Vehicle Target (GVT)



Figure 2 – CESVIMAP vehicle target



Figure 3 – Euro NCAP Vehicle Target (EVT)



Figure 4 – CIRI inflatable vehicle target



Figure 5 – IAG vehicle target



Figure 6 – KTI vehicle target

6.2 Bollard target

The bollard target used for these tests should be circular in section and constructed to represent a typical example found in urban areas. The design should minimise any damage caused to the test vehicle if the bollard is struck during testing. It must be black in colour, have a height of 1.0m above the test track surface with a diameter between 0.10 and 0.13m. The bollard should be a smooth plain cylinder with no ridges/collars. The target may have a test centre logo applied on a surface not visible from the direction of approach of the test vehicle. A typical example is shown in Figure 7.

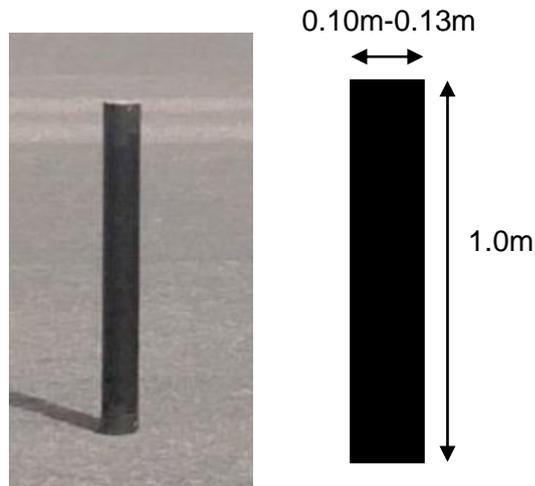


Figure 7 – Bollard target

6.3 Pillar target

The pillar target used for these tests must be square in section and constructed to represent a typical multi-storey building supporting pillar. The design should minimise any damage caused to the test vehicle if the pillar is struck during testing. It should be light grey in colour, have solid faces with no creases. It should have a height of 2.0m above the test track surface of size between 0.45 and 0.55m square with 45° chamfered edges no greater than 0.01m. A typical example is shown in Figure 8. The target may have a test centre logo applied on a surface not visible from the direction of approach of the test vehicle.

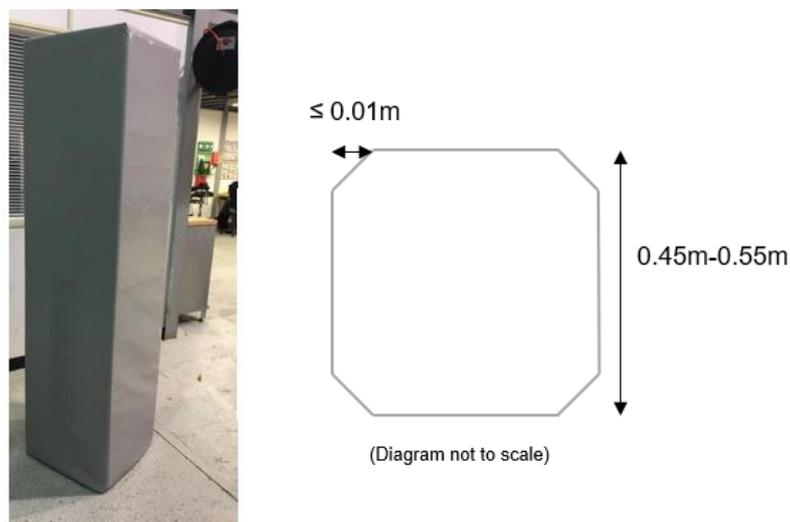


Figure 8 – Pillar target

7 TEST VEHICLE PREPARATION

7.1 General

Tests must be undertaken using a new vehicle in the 'as received' condition. It is permitted that prior to being used for testing the vehicle may be driven a maximum of 5,000km or equivalent as recorded by the odometer.

Prior to starting preparation and testing make sure:

1. All vehicle systems are activated to customer delivery format (i.e. the vehicle is not in pre-delivery mode).
2. All fluids are correctly filled to the vehicle handbook specification.
3. The vehicle fuel tank is to at least 90% of capacity, and fuel is maintained to at least 75% of capacity throughout the testing.
4. The vehicle is in a safe working order.
5. To record the operating software version of the vehicle.

7.2 Tyres

Tests must be undertaken using new, original equipment, all weather (not winter) tyres of the make, model, size, speed and load rating as fitted by the manufacturer to the majority of the vehicles produced of the particular variant tested. It is permitted to test using tyres which are supplied by the manufacturer or acquired at an official dealer representing the manufacturer if those tyres are identical make, model, size, speed and load rating to the original fitment.

Inflate the tyres to the vehicle manufacturer's recommended tyre inflation pressure(s) as specified on the tyre inflation pressure placard or in the vehicle handbook, acknowledging the vehicle loading condition for the testing.

7.3 Instrumentation

Install data measurement and acquisition equipment to sample and record test vehicle data with a minimum accuracy of:

Measurement	Range	Accuracy
Longitudinal and lateral position	Relative to local datum	0.03m
Forward speed	-10 to 10km/h	0.1km/h
Longitudinal acceleration (optional)	$\pm 20\text{m/s}^2$	0.1m/s^2
Yaw angle	$\pm 180^\circ$	1.0°
Steering wheel angle or velocity (optional)	$\pm 720^\circ$ or $\pm 90^\circ/\text{s}$	1.0° or $1.0^\circ/\text{s}$
Contact with target	-	Nearest data point

Table 1 – Instrumentation requirements

Sample and record all dynamic data at a frequency equal to or greater than 100Hz.

8 TEST ENVIRONMENT

8.1 Surface and markings

Conduct tests on a dry (no visible moisture on the surface), uniform, solid-paved surface with a consistent slope between level and 2%.

The surface must not contain any significant irregularities (e.g. large dips or cracks, manhole covers, or reflective studs) that may give rise to abnormal sensor measurements within the area on which the vehicle is tested.

8.2 Surroundings

Tests should be undertaken such that there are no other vehicles, highway furniture, obstructions or other objects protruding above the test surface that may give rise to abnormal sensor measurements within the area on which the vehicle is tested. Any overhead signs, bridges, gantries or other significant structures must be at a height of at least 5.0m above the test surface.

8.3 Ambient conditions

Test only in dry daylight conditions with ambient temperature between 5°C and 40°C. Average wind speeds must be less than or equal to 10m/s to minimise target and test vehicle disturbance.

9 TEST VEHICLE PRE-TEST CONDITIONING

9.1 Brakes and tyres

Test the vehicle with the braking system and tyres in the normal operating condition. If the vehicle has been driven less than 100km, or if the vehicle has not been driven recently and requires conditioning, it may be prepared in the following manner:

1. Perform ten stops from a speed of 56km/h with an average deceleration of approximately 0.5 to 0.6g.
2. Immediately following the series of 56km/h stops, perform three additional stops from a speed of 72km/h, each time applying sufficient force to the pedal to operate the vehicle's antilock braking system (ABS) for the majority of each stop.
3. Immediately following the series of 72km/h stops, drive the vehicle at a speed of 72km/h for five minutes to cool the brakes.

After conditioning maintain the tyres in the same position on the vehicle throughout the testing.

10 P-AEB SYSTEM TESTING

The performance of the test vehicle P-AEB system is evaluated in typical real world collision scenarios with the car, bollard and pillar targets whilst driving straight and around a curve.

10.1 Reversing car-to-car test method

The reversing car-to-car test are comprised of three scenarios:

1. At the point of impact, the longitudinal axes of the test vehicle and car target are parallel, and the test vehicle overlaps 0.40m with the car target, as shown in Figure 9.

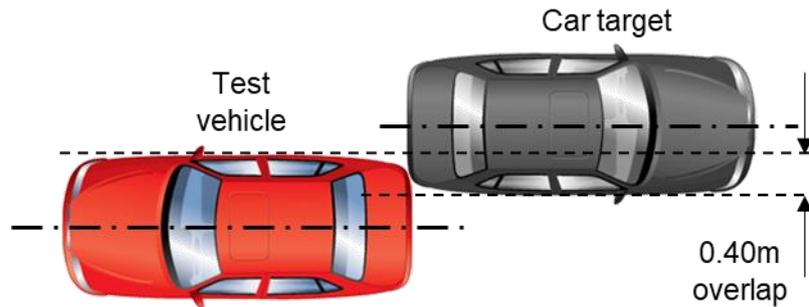


Figure 9 – Reversing car-to-car 0.40m overlap at impact position

2. At the point of impact, the longitudinal axis of the test vehicle is at 45° to that of the car target and the rear corner of the test vehicle aligns with the rear centre of the car target, as shown in Figure 10.

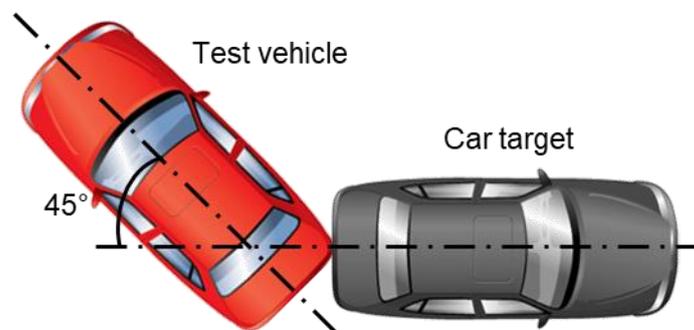


Figure 10 – Reversing car-to-car 45° centre at impact position

3. At the point of impact, the longitudinal axis of the test vehicle is at 10° to that of the car target and the rear corner of the test vehicle aligns with the B pillar of the car target, as shown in Figure 11. The test vehicle impact point on the car target may not necessarily be the corner of the test vehicle as defined because of the vehicle geometry.

Figure 9, Figure 10, and Figure 11 show the rear right corner of the test vehicle at the impact position in all scenarios, however during testing the orientation of the scenario will be randomised to test using the left or right rear corner. Once selected, the same corner of the vehicle is used for all tests (straight and/or turning left and/or right) in the scenario.

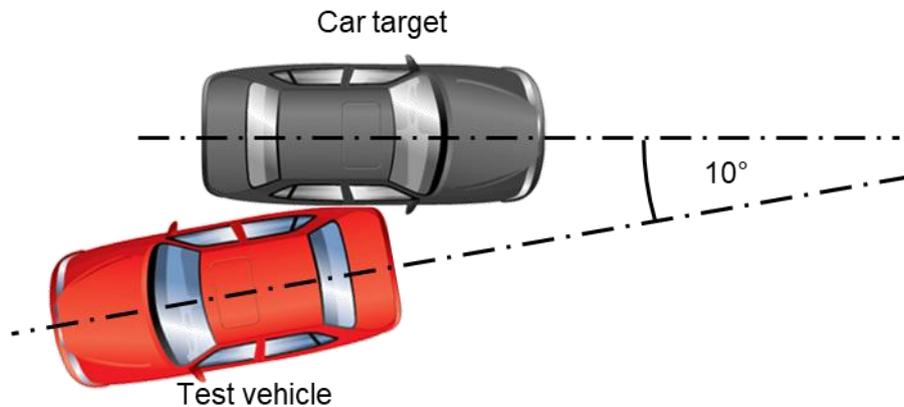


Figure 11 – Reversing car-to-car 10° side at impact position

The rear corner of the test vehicle is identified as the point at which a vertical plane at 45° to the longitudinal axis across the rear corner of the test vehicle makes contact as shown in Figure 12.

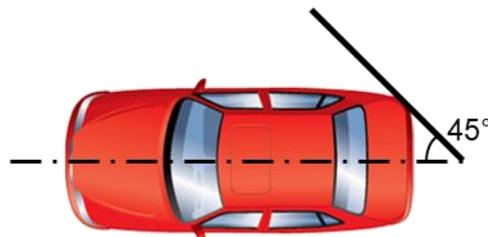


Figure 12 – Identifying the rear corner of the test vehicle

The reversing car-to-car scenarios are tested with three manoeuvres:

1. Straight backwards with the steering wheel in the straight-ahead position.
2. Backwards around a curve with maximum left steering applied.
3. Backwards around a curve with maximum right steering applied.

For vehicles equipped with a hydraulic power assisted steering system, it is permitted to perform testing with slightly less than maximum steering applied to prevent causing damage to the steering system by applying full steering lock for extended periods of time.

The reversing car-to-car scenarios are tested from different ranges as shown in Figure 13:

1. Short Range – for straight backwards testing a speed of 3km/h +1km/h tolerance should be achieved. The separation between the test vehicle and target at impact position should be no smaller than 1.0m and no greater than 2.0m.
2. Long Range - for straight backwards testing a speed of 6km/h +1km/h tolerance should be achieved. The separation between the test vehicle and target at impact position should be no smaller than 5.0m and no greater than 6.0m.
3. For curved tests a speed of 3km/h and 6km/h +1km/h tolerance should be achieved. Maximum steering is to be applied.

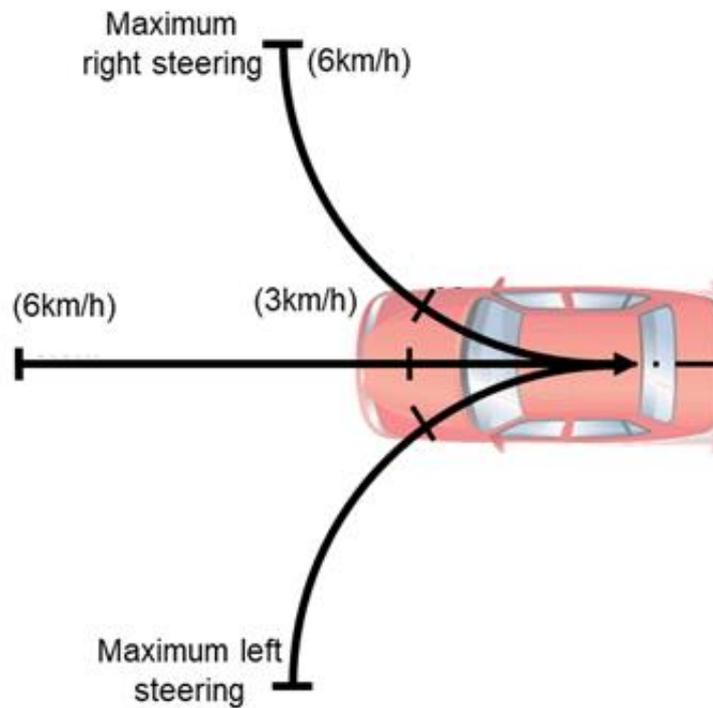


Figure 13 – Test manoeuvres and ranges

Straight line tests are performed with the steering wheel held in the straight-ahead position for the duration of the test according to the following method:

1. Position the test vehicle and the test target together at the appropriate impact position for the test scenario.
2. Holding the steering wheel in the straight-ahead position, smoothly manoeuvre the test vehicle forwards to the test start position to achieve the necessary distance between the test vehicle and the test target for the short range or long-range test.
3. Maintaining the same steering wheel position, reset the system to delete the information of the previous test run as though commencing a new journey, then commence the test reversing back towards the target as prescribed for the short range or long-range test.

The maximum steering test method is similar to that for the straight-line test method but taking into account that vehicles do not necessarily track along the same path when travelling forwards and reversing with the same steering wheel input applied. Therefore, the following method is used to determine the offset required to account for this phenomenon as shown in Figure 14:

1. Align the centre rear of the test vehicle with the corner of the pillar target.
2. Holding the steering wheel in the maximum steering position, smoothly manoeuvre the test vehicle forwards through an arc of 30° (relative to the target) for short range and 90° for long range.
3. Maintaining the maximum steering wheel position, reset the system to delete the information of the previous test run as though commencing a new journey, then smoothly manoeuvre the test vehicle back towards the pillar target and bring the vehicle to a halt immediately before impact.
4. Determine the lateral offset between the centre of the rear of the test vehicle and the corner of the pillar target.
5. Repeat the above process for a total of three runs for both maximum left steering and maximum right steering respectively.
6. Calculate the average offset for maximum left steering and maximum right steering for short and long range test manoeuvres. Apply it as necessary during the testing to achieve the correct test configurations.

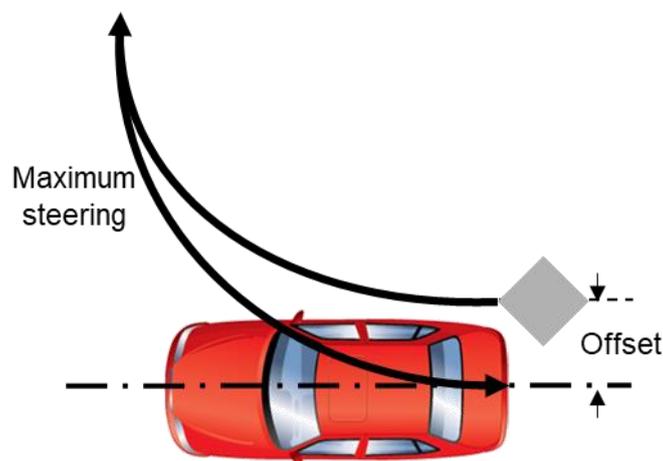


Figure 14 – Offset determination method (effect exaggerated)

Full steering lock tests are performed with the steering wheel held in the full lock position for the duration of the test according to the following method:

1. Position the test vehicle and car target together at the appropriate impact position for the test scenario, acknowledging and applying the offset calculated previously.
2. Holding the steering wheel in the full lock position, smoothly manoeuvre the test vehicle forwards to the test start position to achieve the necessary angle between the test vehicle and car target as specified in the short and long range criteria.
3. Maintaining the same maximum steering position, reset the system to delete the information of the previous test run as though commencing a new journey, then commence the test reversing back towards the target at the speed prescribed by the short and long range criteria. No further steering inputs should be necessary to maintain the test vehicle tracking along the test path.

For vehicles with an automatic transmission attempt the test manoeuvres with the vehicle creeping, however a minor smooth application of the accelerator pedal may be required to achieve the test speed before automatic braking occurs. For vehicles with a manual transmission it may be necessary to apply minor smooth accelerator pedal inputs and slip the clutch to achieve the test speed before automatic braking occurs.

Do not apply the test vehicle brakes at any time throughout an AEB system test unless necessary to maintain a safe testing environment. The application of the brakes at any time throughout a P-AEB system test run invalidates the test run.

The end of the test is when the test vehicle either impacts the test target or comes to a halt thus avoiding an impact plus a further 2.0 seconds of data to confirm the test vehicle action immediately after automatic braking.

The result for a test run is either:

- **Pass** – collision with the test target avoided as a result of P-AEB
- **Fail** – impact occurred with the test target, even at reduced speed.

Each test is performed twice and the overall result is the aggregate of the two individual results. If the results of the two tests are inconsistent a third test is performed and the overall result is taken as the majority result of the three individual results, i.e. pass, fail and then pass achieves an overall pass for the test, pass, fail and then fail achieves an overall fail.

10.2 Reversing car-to-bollard

The reversing car-to-bollard test comprises of two scenarios:

1. At the point of impact the centreline of the bollard is aligned with the longitudinal centreline of the test vehicle, as shown in Figure 15.
2. At the point of impact the centreline of the bollard is 0.40m inbound from the side of the test vehicle, also shown in Figure 15.

The reversing car-to-bollard tests are performed from both the short and the long range reversing straight backwards only, following the method described for the car-to-car straight backwards test scenario and applying the same result pass/fail criteria.

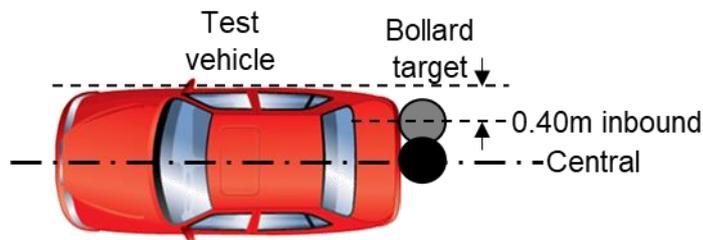


Figure 15 – Reversing car-to-bollard central and 0.40m inbound at impact position

10.3 Reversing car-to-pillar

The reversing car-to-pillar test comprises of two scenarios:

1. At the point of impact, the corner of the pillar is aligned with the longitudinal centreline of the test vehicle, as shown in Figure 16.
2. At the point of impact, the corner of the pillar is 0.40m inbound from the side of the test vehicle, also shown in Figure 16.

The faces of the pillar target should be orientated at 45° to the longitudinal centreline of the test vehicle.

The reversing car-to-bollard tests are performed from both the short and the long range reversing straight backwards only, following the method described for the car-to-car straight backwards test scenario and applying the same result pass/fail criteria.

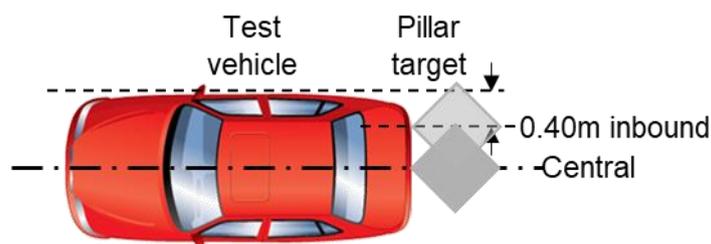


Figure 16 – Reversing car-to-pillar central and 0.40m inbound at impact position

10.4 Forwards car-to-car

The car-to-car front test is comprised of the following scenario:

At the point of impact the longitudinal axes of the test vehicle and car target are parallel and the test vehicle **passenger side** overlaps 0.40m with the rear of the car target, as shown in Figure 17.

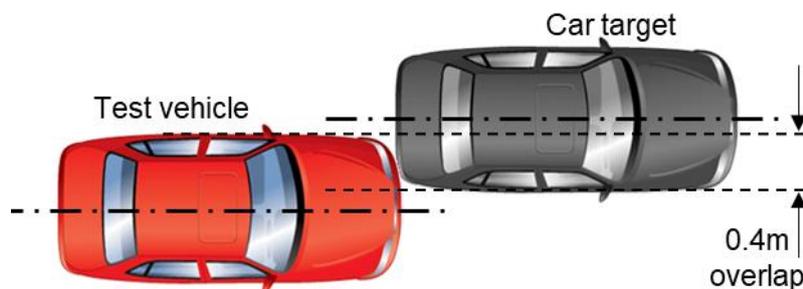


Figure 17 – Forwards Car-to-Car 0.4m Overlap

The frontal car-to-car scenarios are tested at the short- and long-range **straight** conditions shown in Figure 13.

Straight line tests are performed with the steering wheel held in the straight ahead position for the duration of the test according to the following method:

1. Position the test vehicle and the test target together at the appropriate impact position for the test scenario.
2. Holding the steering wheel in the straight-ahead position, then smoothly manoeuvre the test vehicle backwards to the test start position to achieve the necessary distance between the test vehicle and the test target for the short range or long range test.
3. Maintaining the same steering wheel position, reset the system to delete the information of the previous test run as though commencing a new journey, commence the test driving forwards towards the target as prescribed for the short range or long-range test.

10.5 Forwards car-to-bollard

The car-to-bollard front test comprises of one scenario:

1. At the point of impact the centreline of the bollard is 0.40m inbound from the side of the test vehicle, as shown in Figure 18.

The car-to-bollard tests are performed from both the short and the long range driving **straight** forwards only, following the method described for the car-to-car straight forwards test scenario and applying the same result pass/fail criteria.

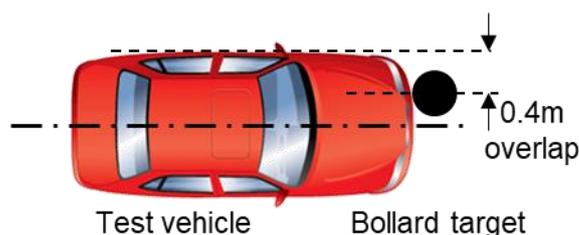


Figure 18 – Car-to-bollard 0.4m overlap forwards

10.6 Maximum steering offset procedure for forwards testing

The forwards maximum steering test method is similar to that for the reverse maximum steering test method and uses the following procedure (Figure 19).

1. Align the centre front of the test vehicle with the test origin.
2. Holding the steering wheel in the maximum steering position, smoothly manoeuvre the test vehicle backwards through an arc of 30° (relative to the origin) for short range and 90° for long range.
2. Maintaining the maximum steering wheel position, reset the system to delete the information of the previous test run as though commencing a new journey, then smoothly manoeuvre the test vehicle forwards towards the origin at the appropriate short or long range speed and bring the vehicle to a halt one the vehicle has returned through the 30° or 90° arc.
3. Determine the lateral and longitudinal offset between the centre of the front of the test vehicle and the corner of the pillar target.
4. Reduce the steering angle for the forwards section of the path until the longitudinal offset is zero at the end of the 30° or 90° arc.
5. Repeat the above process for a total of three runs for both maximum left steering and maximum right steering respectively.
6. Calculate the average lateral offset for maximum left steering and maximum right steering for short and long range test manoeuvres. Apply the offset as necessary during the testing to achieve the correct test configurations.

Full steering lock tests are performed with the steering wheel held in the full lock position for the duration of the test according to the following method:

1. Position the test vehicle and car target together at the appropriate impact position for the test scenario, acknowledging and applying the offset calculated previously. For scenarios where the vehicle start is overlapping the target it is permitted to move the target into position when the vehicle moves to the test start position.
2. Holding the steering wheel in the full lock position, smoothly manoeuvre the test vehicle backwards to the test start position to achieve the necessary angle between the test vehicle and car target as specified in the short and long range criteria.
3. With the appropriate steering angle applied, reset the system to delete the information of the previous test run as though commencing a new journey, then commence the test driving forwards towards the target at the speed prescribed by the short and long range criteria. No further steering inputs should be necessary to maintain the test vehicle tracking along the test path.

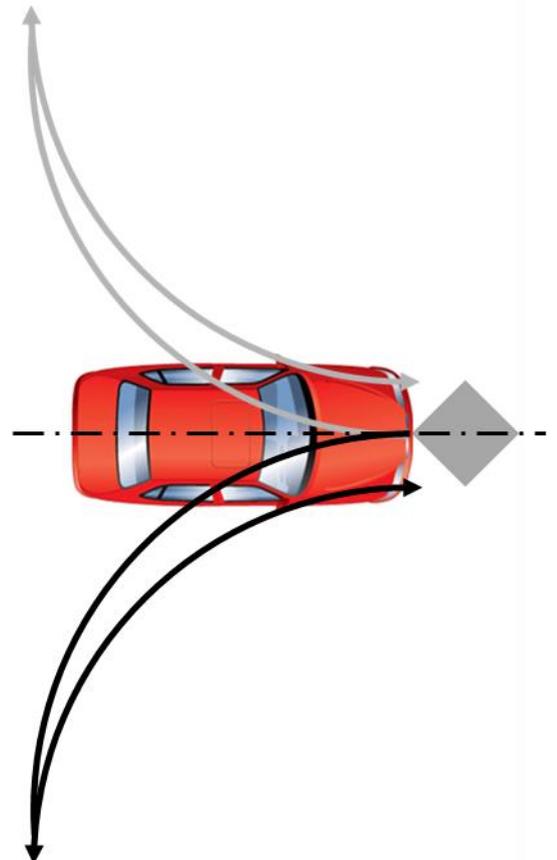


Figure 19 – Maximum steering offset method

10.7 Forwards car side-to-bollard

The car-to-bollard side-swipe test comprises the following scenario:

1. The impact area is from the midpoint of the vehicle to the leading edge of the rear wheel (Figure 20).
2. This scenario is performed at the long-range condition only, with a steering lock orientation that results in the bollard being on the **inside** of the vehicle's turning path while travelling **forwards**.

The car-to-bollard side-swipe scenario is conducted in accordance with the procedure for the forwards steering tests described previously.

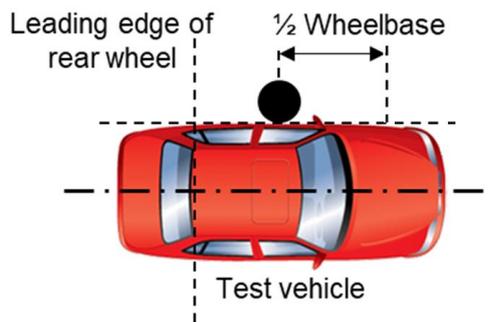


Figure 15 - Bollard Forwards Sideswipe

10.8 Reverse car side-to-pillar

The car-to-pillar side-swipe test comprises the following scenario:

1. The impact area is from the leading edge of the rear wheel to the midpoint of the wheelbase (Figure 21) with the pillar target orientated at 45° to the vehicle rear side.
2. This scenario is performed at the long-range condition only, with a steering lock orientation that results in the bollard being on the **outside** of the vehicle's turning path while travelling in **reverse** considering the procedure for the reverse steering tests described previously.

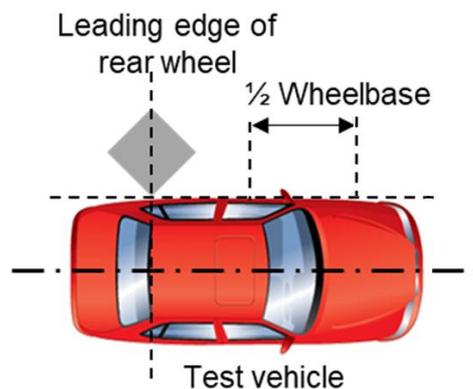








Figure 16 - Pillar Reverse Sideswipe

11 P-AEB Scenario Testing Selection

When performing the P-AEB scenarios ALL test scenarios from Group A, Table 2 – Scenario grouping, MUST be tested. Scenarios in Group B may be undertaken if the test lab desires.

Group A:

	Test Scenario	Image	
Car-to-Car	Straight Rear (3km/h)		
	Straight Rear (6km/h)		
	Straight Rear 0.4m Overlap (3km/h)		
	Straight to Rear 0.4m Overlap (6km/h)		
	Straight Rear 10° Side Impact (3km/h)		
	Straight Rear 10° Side Impact (6km/h)		
	Straight Frontal (3km/h)		
	Straight Frontal (6km/h)		
	Straight Frontal 0.4m Overlap (3km/h)		
	Straight Frontal 0.4m Overlap (6km/h)		
	Straight Rear 45° Corner Rear Centre (3km/h)		
	Straight Rear 45° Corner Rear Centre (6km/h)		
	Car-to-Object	Straight Rear 0.4m Inbound Pillar (3km/h)	
		Straight Rear 0.4m Inbound Pillar (6km/h)	
Straight Rear Bollard (3km/h)			
Straight Rear Bollard (6km/h)			
Straight Rear 0.4m Inbound Bollard (3km/h)			
Straight Rear 0.4m Inbound Bollard (6km/h)			
Straight Front 0.4m Inbound Bollard (3km/h)			
Straight Front 0.4m Inbound Bollard (6km/h)			
Inside Turn Bollard (6km/h)			
Outside Turn Pillar (6km/h)			

Group B:

	Test Scenario	Image
Car-to-Car	Curve Left Rear 0.4m Overlap (6km/h)	
	Curve Right Rear 0.4m Overlap (6km/h)	
	Curve Left Front 0.4m Overlap (6km/h)	
	Curve Right Front 0.4m Overlap (6km/h)	
	Curve Left Rear 45° Corner Centre (3km/h)	
	Curve Right Rear 45° Corner Centre (3km/h)	

Table 2 – Scenario grouping

12 DATA PROCESSING AND ANALYSIS

12.1 Speed

Use data as recorded.

12.2 Longitudinal acceleration

Filter the unfiltered longitudinal acceleration data with a 12 pole phaseless Butterworth filter with a cut off frequency of 6Hz. Zero the filtered data to remove sensor offset using the static pre-test data. Correct longitudinal acceleration relevant to the ground plane by removing the effects of vehicle body pitch under braking.

To determine when continuous pre-impact braking starts, find the first data point where the filtered and zeroed longitudinal acceleration is less than -1.0m/s^2 to confirm the vehicle is decelerating, and then inspect previous data points to find the first data point where the longitudinal acceleration is less than -0.3m/s^2 . The first data point where the longitudinal acceleration is less than -0.3m/s^2 is the start of automatic braking.

12.3 Yaw angle

Use data as recorded.

12.4 Lateral and longitudinal position

Use data as recorded.

12.5 Steering wheel angle (optional)

Use data as recorded.

12.6 Accelerator pedal position (optional)

Use data as recorded.

13 TEST RESULTS

The result for a test run is either:

- **Pass** – collision with the test target avoided as a result of P-AEB
- **Fail** – impact occurred with the test target, even at reduced speed.

Each test is performed twice, and the overall result is the aggregate of the two individual results. However, if the results of the two tests are inconsistent a third test is performed and the overall result is taken as the majority result of the three individual results, for example:

- Fail, pass, pass would achieve an overall pass.
- Pass, fail, fail would achieve an overall fail.

14 SYSTEM PERFORMANCE REQUIREMENTS

In order to be recognised the P-AEB system must:

- Be automatically engaged and active whenever reverse is selected when the vehicle is in operating in a mode for driving on solid paved surfaces. A means by which the driver can deactivate the system is permitted providing that the system is automatically activated the next time reverse is selected.
- Be either automatically activated when travelling slowly forwards, or able to activate by the driver when travelling in a parking scenario.
- Visualise to the driver the location of the collision partner relative to the test vehicle.
- Continue to hold the vehicle stationary for a period of at least 1.0s after the P-AEB system has been brought the vehicle to a halt in the tests where a collision is avoided. This function may be overridden if the driver applies a substantial accelerator demand.
- Not have its performance adversely affected by typical light soiling of the sensors.

END OF DOCUMENT